


Technical information

Total length with headboard and footboard (A)	2140 mm. ± 10 mm.
Total length (mode delivery bed) (B)	1620 mm. ± 10 mm.
Total width with rails (C)	970 mm. ± 10 mm.
Bed base height (low position) (D)	540 mm. ± 10 mm.
Bed base height (high position) (E)	970 mm. ± 10 mm.
Crane passing clearance height	160 mm. ± 10 mm.
Backrest tilting angle (F)	70° ± 5°
Trend / Reverse Trend position angles	14° / 16° ± 5°
maximum bed weight without mattress and accessories	140 kg.
Maximum patient weight (MPW)	165 kg.
Safe working load (SWL)	230 kg.
Mattress width	825 mm.
Mattress length (fixed section)	1370 mm.
Mattress length (removable section)	500 mm.

** This heights can vary ± 40 mm. according to the bed configuration

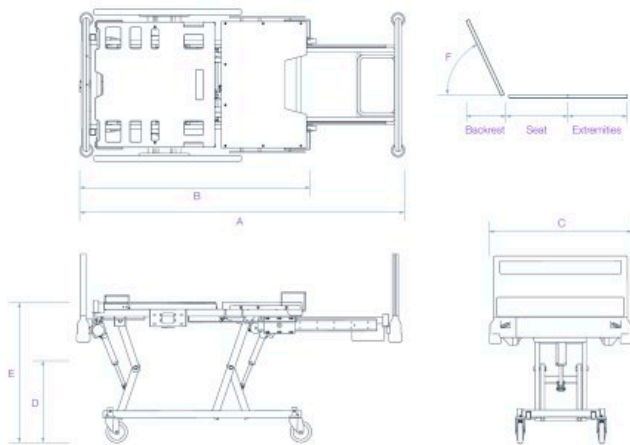

Electrical information

Lifting system	By linear motors
Backrest lifting system	By linear motor
Voltage and frequency	230 V / 50 - 60 Hz
Electric shock protection / liquid penetration	Class II / Type B / IP66
Maximum consumption	Max. 3 15A (maximum 400 W)
Motor intermittent operation	10% 2 min. - 18 min.

All our manufacturing is protected by our patents. Pardo reserves the right to modify, without prior notice, our models and technical specifications described in this datasheet. This technical information refers to a standard configuration. Any option can make it varies.

Standard

Controls	Protection	Transport	Wellness	Others	Accessories
Patient control	Full length rails	Ø150mm double covered wheels			IV Pole
	Removable headboard	Brake pedal			Trapeze bar

Optional

Controls	Protection	Transport	Wellness	Others	Accessories
Blockages control			Back cushion	Battery	Hand grips
Lifting pedal					Squatting bar
					Foot supports
					Adjustable leg rests